


The illustration above displays the ceiling mounting arrangement for the ST 12 Mk2/ ST 12T loudspeaker and identifies the essential hardware supplied.


Components

- Loudspeaker Mount BCA-II
- Anchor Bolts M8
- ST 12 MK2/ ST 12t Loudspeaker
- BCA- U- LR

ST 12 MK2 / ST 12t Wall Mounting

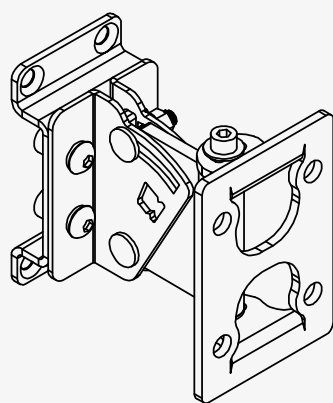

BCA-II Clamp Assembly

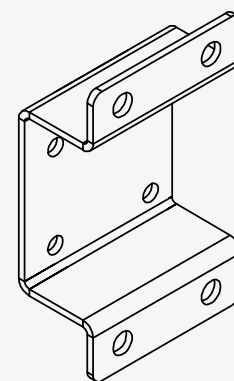

BCA-U-LR

How to mount the Loudspeaker?

- o Position BCA-II flat against the wall surface and mark the space for the bolts.
- o Insert the anchor bolts and tighten the mounts to wall
- o Remove the bolts from behind the cabinet and tighten it to the other end of the BCA II clamp.
- o To give space between the wall and the cabinet add BCA-U-LR.

Caution: As the load is dynamic ensure the Loudspeaker is not mounted to any surface where the anchor bolts may get loose in the wall. This could result in a major accident.