


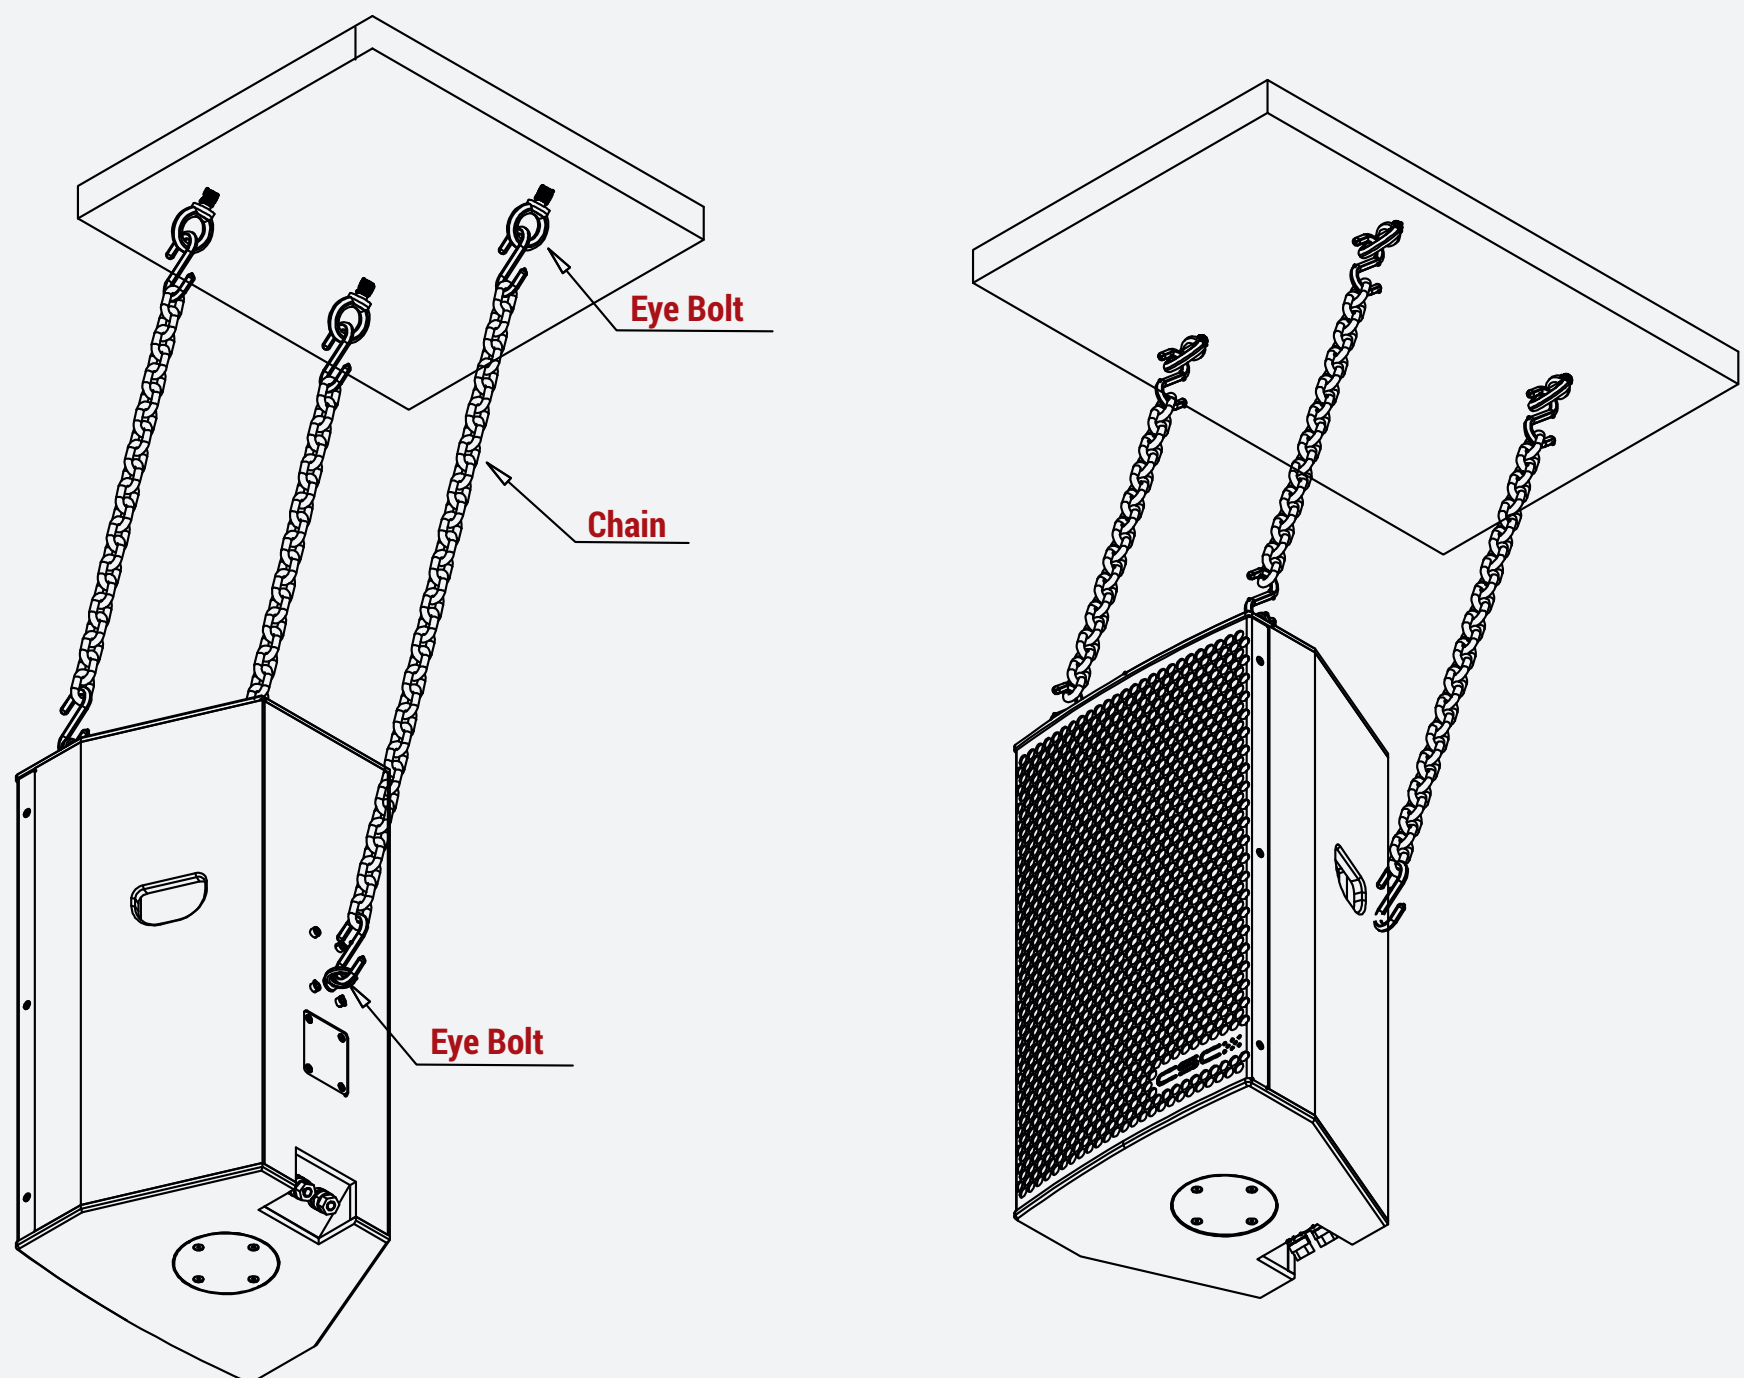

The illustration above displays the ceiling mounting arrangement for the CC8 loudspeaker and identifies the essential hardware supplied.

Component Locations

Eye Bolts:

- o Installed in designated suspension points.
- o Provide strong and rated connection for hanging.

Chain / 6 mm Wire:

- o Used for overhead suspension from ceiling.
- o Provides safe and flexible drop height.

ST12 MK2 / ST12t Loudspeaker:

- o Suspended via eye bolts and chain system.
- o Remains balanced and supported.

ST 12 MK2 / ST 12t Chain Suspension

Application Guidance

- o Insert rated eye bolts securely.
- o Attach chain/wire to load-bearing ceiling structure.
- o Suspend loudspeaker ensuring it hangs level.
- o Inspect all suspension components before use.

This configuration ensures a stable, secure, and standards-compliant ceiling mounting for the CC8 loudspeaker, showing all hardware placement and component relationships clearly.