


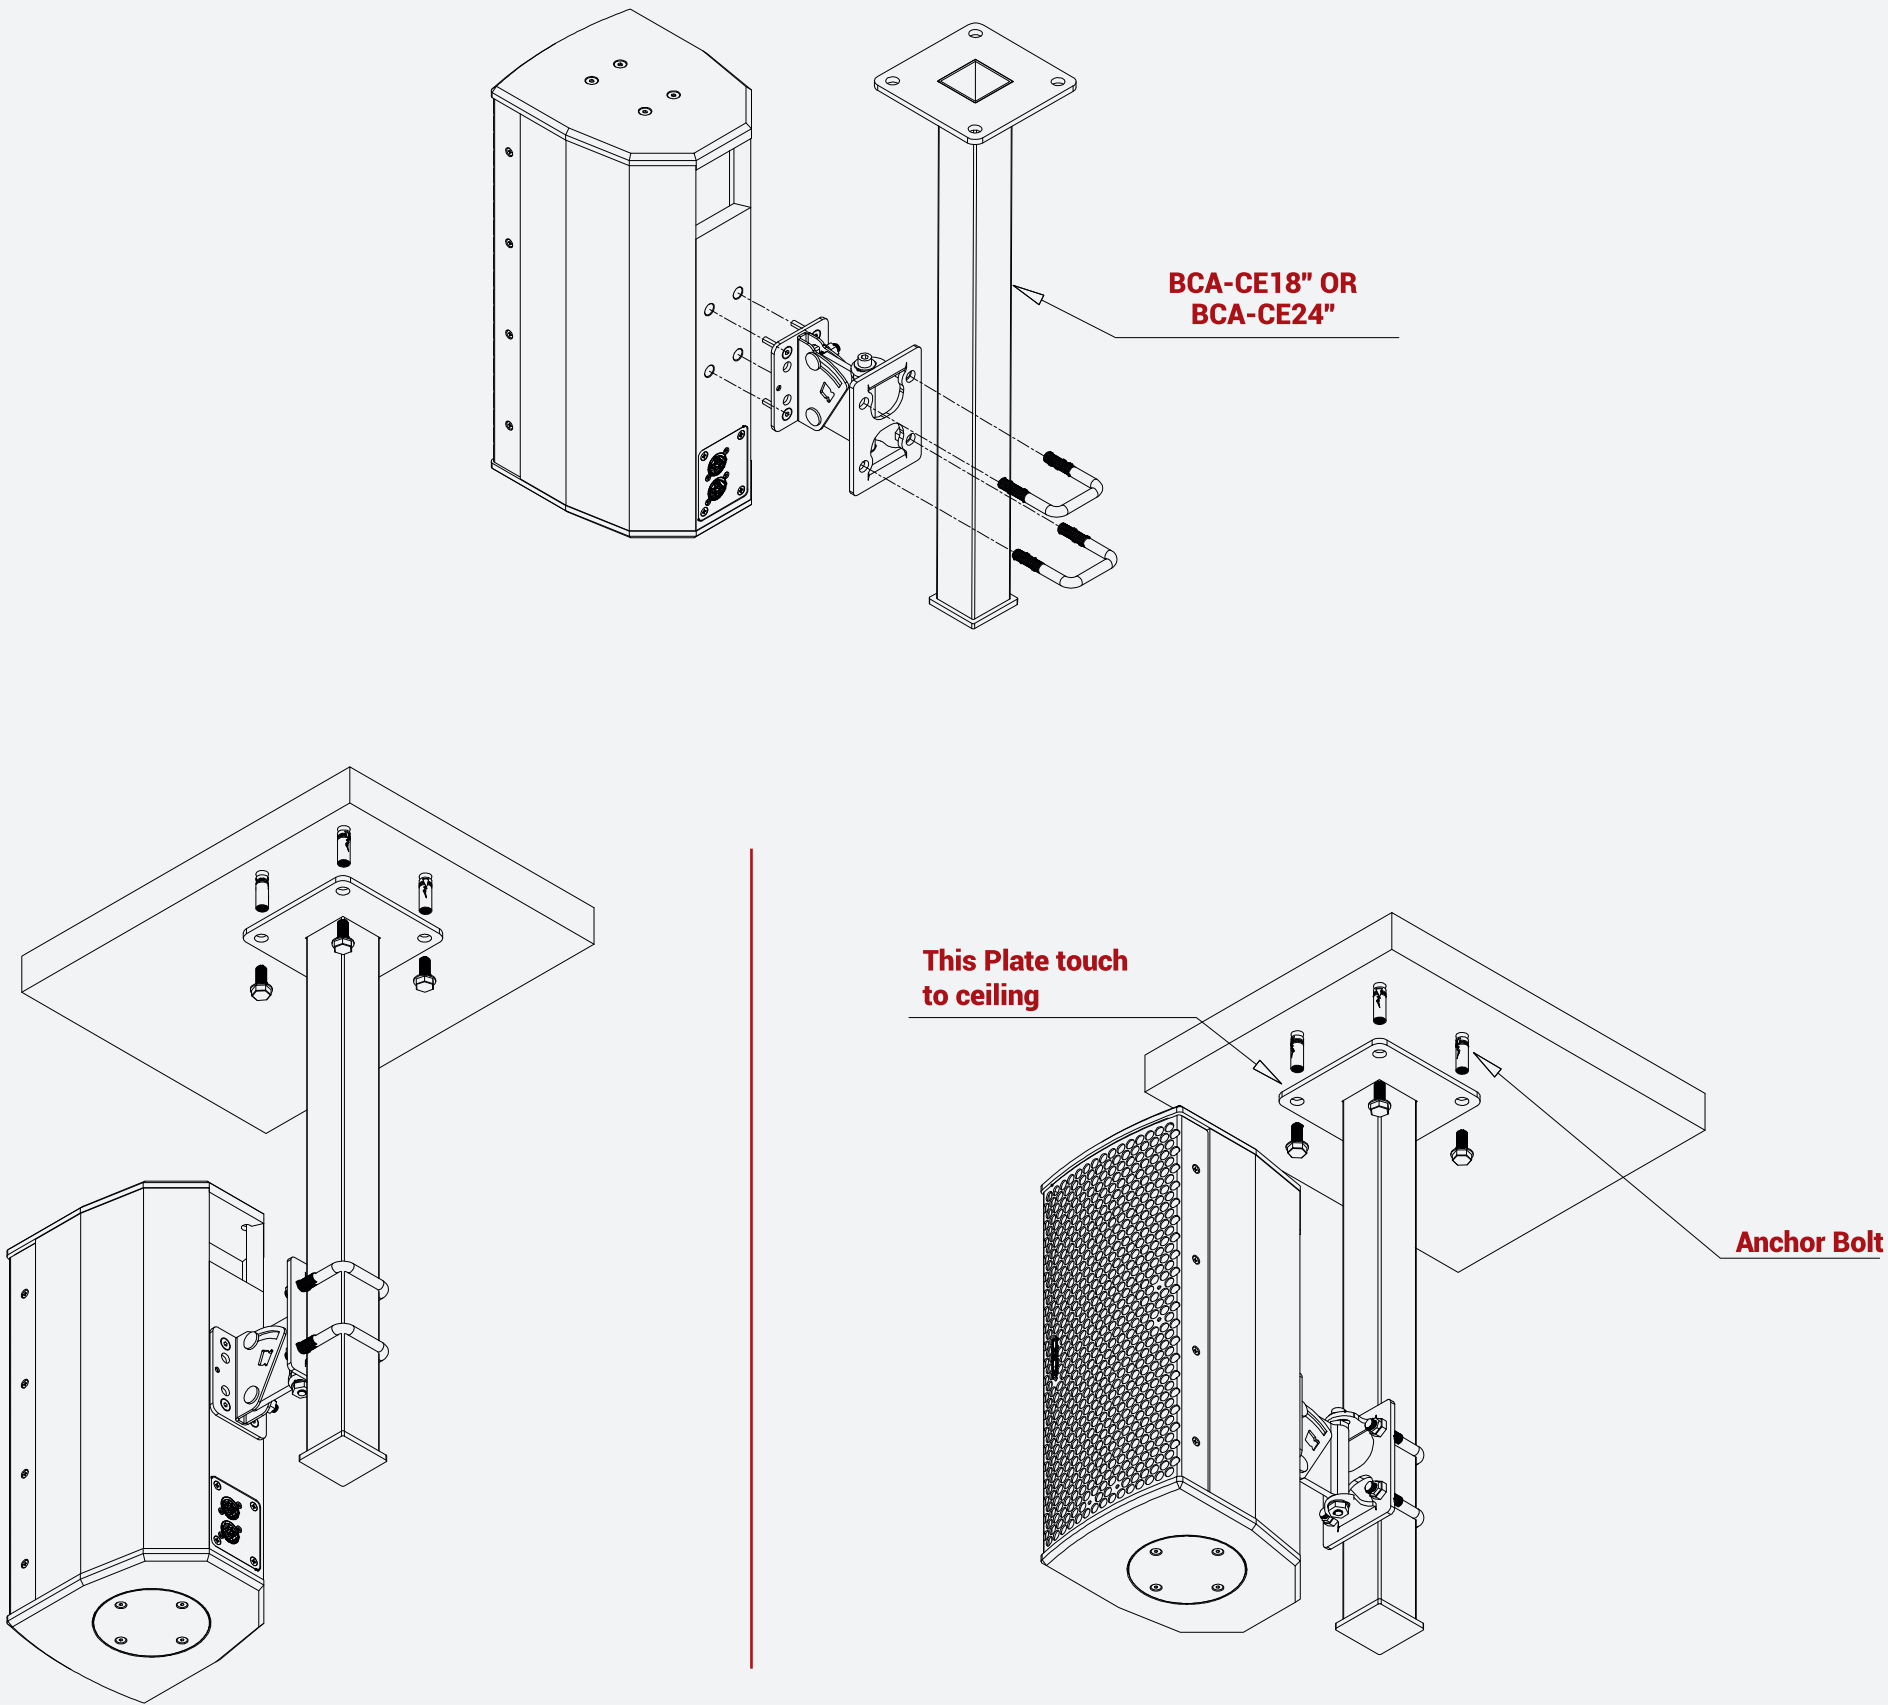

The illustration above displays the ceiling mounting arrangement for the CC8 loudspeaker and identifies the essential hardware supplied.

Component Locations

Ceiling Plate:

- o Positioned flush against the ceiling surface.
- o Acts as the structural base for the mounting system.

Anchor Bolts:

- o Inserted into the ceiling through pre-drilled holes.
- o Provide load-bearing attachment for the assembly.

Mounting Tube (50x50mm, BCA-CE18” or BCA-CE24”):

- o Fixed vertically between plate and clamp.
- o Available in 18” or 24” to suit installation height.


BCA-I Clamp Assembly:

- o Attached to the end of the mounting tube.
- o Provides strong connection between tube and loudspeaker.

CF205 Loudspeaker:

- o Mounted securely beneath clamp.
- o Supported by vertical assembly.

CF 205 Ceiling Mounting

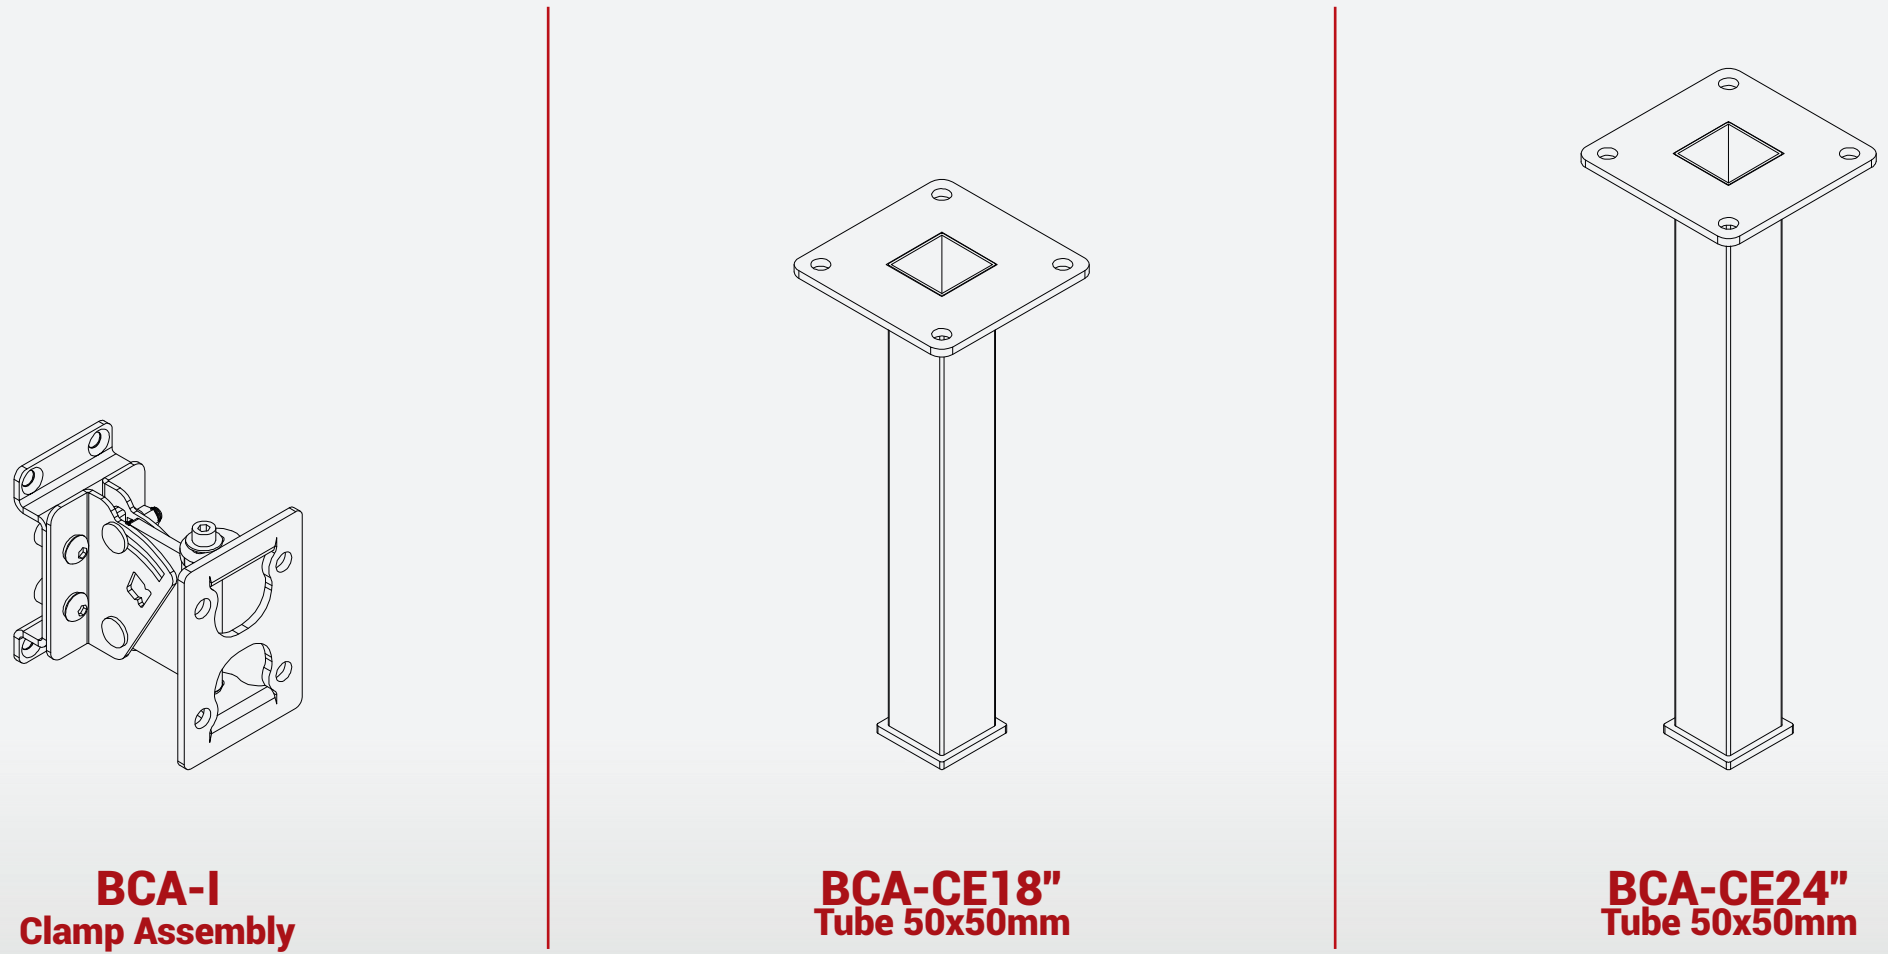

Application Guidance

- o Secure ceiling plate flat with suitable anchor bolts.
- o Choose appropriate tube length (18”/24”) and fix properly.
- o Attach BCA-I clamp tightly to tube.
- o Mount CF205 loudspeaker verifying safe alignment.