

The illustration above displays the ceiling mounting arrangement for the CC8 loudspeaker and identifies the essential hardware supplied.

Component Locations

FYX Assembly:

- o Serve as suspension interfaces for loudspeaker.
- o Connect directly to chain system.


Chain & S-Hooks (user-supplied):

- o Connect directly to chain system.
- o Provide load-bearing suspension.

RR212H Loudspeaker:

- o Mounted using FYX and chain.
- o Suspended securely from ceiling.

RR 212H Chain Suspension (Ceiling Rigging)

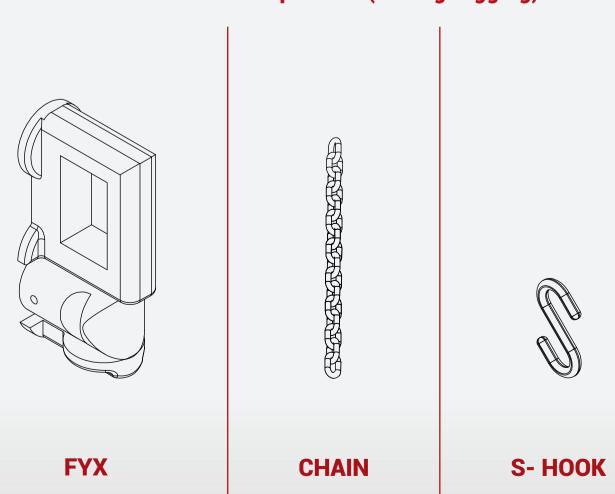

Application Guidance

- o Attach FYX assemblies securely to structure.
- o Connect chain and S-hooks rated for weight.

- o Suspend loudspeaker ensuring stability.
- o Perform pre-use safety checks.